

SL 210


PRODUCT SPECIFICATION SHEET

Double Beam UV-Vis Spectrophotometer



Double Beam UV-VIS
Spectrophotometer

SL 210



Double Beam



Touch Screen



Cuvette



PC

7" TFT Touch Color Graphical Display

Smallest form factor Double Beam Spectrophotometer

PC Compatibility through USB

SALIENT FEATURES

- Configurable fixed Bandwidth 1nm or 1.8nm.
- Automatic wavelength calibration and programmable wavelength for lamp change over.
- Lamp selection enables conserving the life of the lamps.
- Stand alone unit offers an advanced technology with data processing features for Scanning, Discrete Wavelength, Concentration determination by standards and -factor method, Time scan with minimum time interval of 1.0 sec, Auto-zero facility, Self check and Self diagnostic modes.
- Data in the form of graph and table can be printed directly on to a printer.
- Supports USB printing with PCL 5e class printers.
- Standard & Sample data saving in conc mode.

SOFTWARE FEATURES

- USB Print Option with user selectable print range & print interval. Run graph with auto scaling.
- Software offers an advanced data processing features like Spectral analysis (Addition, Subtraction, Division, Spectra Comparison)



Chemical



Agriculture



Pharmaceutical



MicroNutrients



Soil



Pesticide



Academic



Metals



Fertilizer



Cement



Dyes



Food & Beverages



Glass



Mines & Geology

APPLICATIONS

- For any Spectrophotometric or Colorimetric measurement where applications require very high-resolution bandwidth and cGLP compliance is mandatory.
- Enzyme Kinetics.
- Organic compounds in Biological matter. Glucose, Fructose, Carbohydrates, Proteins etc., in Foods.
- Edible Dyes, Alcohols etc., in Beverages. Purity of constituents in Pharmaceuticals.
- Toxic elements like Cadmium, Lead, Arsenic and Mercury etc., in Effluents.
- Constituents in compositions used in Metallurgy, Fertilizer, Pesticide, Chemical, Petrochemical, Steel, Cement, Glass & Other Industries.
- Micronutrients like N, P, K, S, Ca, Mg, Zn, Cu, B, Mo, etc., in Agricultural soil, Plants etc.
- Life Science Application.

SPECIFICATIONS

SPECTRAL

Range	190 to 1100 nm
Bandwidth	1nm or 1.8nm
Readability	0.1 nm
Accuracy	± 0.3 nm
Repeatability	± 0.2 nm

LIGHT SOURCE

Deuterium Lamp (D₂) & Tungsten (W) Halogen Lamp

STORAGE

128 GB

DETECTOR

Silicon Photo Diode or PMT

DATA PRESENTATION

Display	7" TFT Touch Color Graphical Display
Hard Copy	On printer (USB interface)

DATA PROCESSING

Spectrum, Concentration, Concentration by ϵ -Factor, Enzyme Kinetics, Overlay, Time Scan, Discrete Wavelength, Ratiometric, Peak Picking, Spectra Zooming, Smoothing, Data Saving & Retrieval, Auto Zero facility and Printing

PHYSICAL DIMENSIONS

Size (WxDxH) in mm	500 x 375 x 230
Weight (in kg)	Approx. 15

POWER REQUIREMENT

90-260 V AC, 50-60 Hz, 1 ϕ , 170 VA Max.

PHOTOMETRIC

System	Double beam optics	
Range	± 3.5 Abs	
Accuracy	± 0.005 Abs at 1.0 Abs	
	± 0.010 Abs at 1.5 Abs	
Repeatability	± 0.002 Abs at 1.0 Abs	
Stability (Baseline)	± 0.003 Abs/hr. after warm up	
Stray Light	<0.05% T at 220 nm with NaI 10g/L	
Readability	%T	0.01
	Abs	0.0001

MONOCHROMATOR

Concave holographic grating with 1200 lines/mm

CONTROL

Standalone	Micro controller
Optional	Through Computer

PORTS

3 USB ports - Can be used for Printer, Keyboard, Pen Drive and Mouse

TCP / IP, Ethernet, WiFi

Port - PC Connectivity

SAMPLE ATTACHMENT


Standard	Fixed 10mm path length Holders for Reference and Sample.
Optional	Fixed multi path cuvette holders for Reference and Sample accommodating 10mm to 100 mm cuvettes.
	Fixed cuvette holder for Reference and 6 Position motorized 10 mm path cell holder for Sample.
	Fixed cuvette holder to accommodate micro cuvettes.

ACCESSORIES SUPPLIED


With Instrument	10 mm Path length Cuvettes, Built in UV VIS Spectratreats® Software
At extra Cost	Multi Path length Cuvette holder, 10 mm, 20 mm, 40 mm, 50 mm and 100 mm Path length Cuvettes, Micro Cuvettes, USB Pen Drive and Printer



Single cuvette holder (standard)

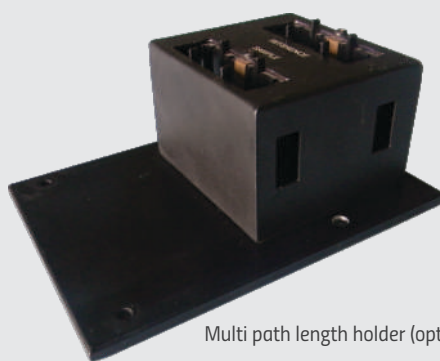

Multi path length holder (optional)



6 cuvettes holder (optional)

Celebrating 60 years
of our Journey



www.elico.co/60years



www.elico.co

ELICO[®]

An ISO 9001:2018 | 14001 | 27001 Certified Company

B-90, A.P.I.E., Sanathnagar, Hyderabad 500 018, Telangana., India

Tel +91 40 44451234 Fax +91 40 23771639 info@elico.co

Ahmedabad

ahm@elico.co
+91 98241 75321

Bengaluru

blr@elico.co
+91 99000 28741

Bhopal

bpl@elico.co
+91 99930 96876

Bhubanewswar

bbr@elico.co
+91 99371 12105

Chennai

chn@elico.co
+91 98402 65797

Cochin

kel@elico.co
+91 81291 84400

Delhi

del@elico.co
+91 98710 06104

Guwahati

gau@elico.co
+91 912111 77451

Hyderabad

hyd@elico.co
+91 99896 25457

Kolkata

kol@elico.co
+91 912111 77452

Lucknow

lku@elico.co
+91 91980 01666

Mumbai

mum@elico.co
+91 77100 96111

Patna

pat@elico.co
+91 912111 77450

Visakhapatnam

vtz@elico.co
+91 99899 94532

